



VH Series Hydraulic Dock Leveler Specification Sheet and Submittal

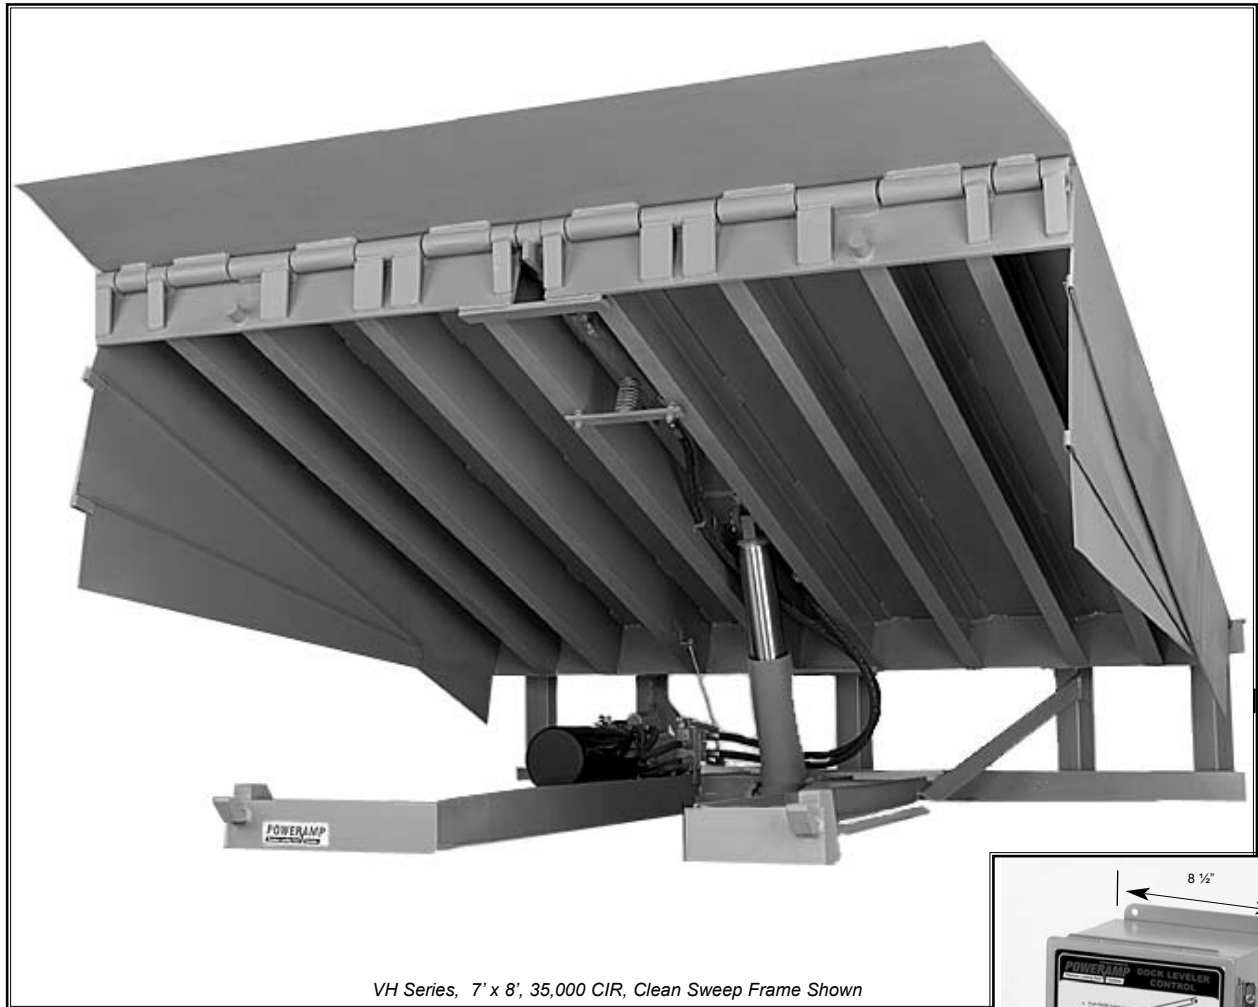

VH Series, 7' x 8', 35,000 CIR, Clean Sweep Frame Shown

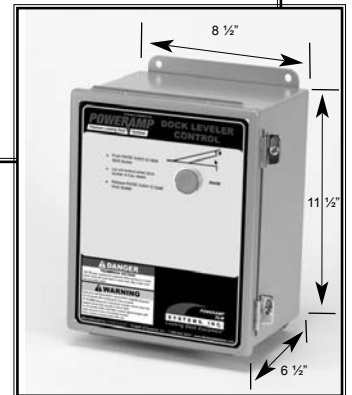

STANDARD FEATURES FOR THE VH SERIES HYDRAULIC DOCK LEVELER

- Push Button Control Box
- Structural Steel Support Members
- Fluid Logic Block
- Hollow Ram Hoist Cylinder
- Automatic Retracting Lip Cylinder
- Low Pressure Hydraulic System
- Integral Tamperproof Velocity Safety Stop
- Lockout Tagout Maintenance Strut
- Night Locks/Cross Traffic Support
- 3-wheel Fork Truck Protection
- Auto Return to Dock (above dock only)
- Overhead Door Interlocks (Dry Terminal)
- Full Range Toe Guards
- B410-14 Laminated Bumpers



VH Series Hydraulic Dock Leveler Specification Sheet

GENERAL DESCRIPTION: All POWERAMP VH Series dock levelers incorporate the use of hydraulics to raise and lower both the platform and lip. A single push button activates a hydraulic pump for operating both lip and hoist cylinders. Systems, Inc. is an active member of Loading Dock Equipment Manufacturers (LODEM), a product section of the Material Handling Industry. Unit conforms to OSHA, U.S. Department of Commerce Standard CS-202-56 and is manufactured in compliance with the American National Standard of Safety Performance and Testing of Dock Leveling Devices (ANSI) MH 30.1. Unit manufactured by Systems, Inc.

CONSTRUCTION: The platform is constructed of 1/4" thick 4-way high tensile 50,000 minimum yield A572 steel safety treadplate. Platform is reinforced and supported by full-length structural "C" channels and/or "I" beams. Front and rear header plate is of either 1/2" x 7" or 1/2" x 8" hot rolled steel. POWERAMP VH Series lips are made of 4-way safety treadplate, the 25,000 lb Comparative Industry Rating (CIR) are 1/2" thick, the 30,000, 35,000 and 40,000 lb CIR are 5/8" thick, and the 45,000 50,000 and 60,000 lb CIR are 3/4" thick. The standard lip length is 16" on all capacities except the 60,000 lb CIR which is 18". Hinge tubes are 1 3/4" OD x 5/16" wall, 1 7/8" x 3/8" wall, 2 1/8" x 1/2" wall, or 2 5/8" x 3/4" wall depending upon CIR. All lip hinge pins are 1" M1044 steel. Steel lip gusset are standard on 50,000 and 60,000 lb CIR models. Steel header gussets are standard on all models 35,000 lb CIR and above. All platforms are designed to compensate for up to 4" of canted truck beds.

HYDRAULICS: Fluid Logic block is a close-grained ductile casting with precision machined "logic" paths and ports for control of all hydraulic functions. Hoist cylinder is 3 1/2" hard chrome-plated hollow ram design. Lip operation is controlled by a cylinder having a 2 1/2" ID bore and is fully yieldable. Lip cylinder is nickel plated for extended durability. Every hoist cylinder is equipped with an integral tamperproof velocity safety stop to limit free fall of loaded platform to 3"(±1"). Hydraulic system is designed to operate at low pressures from 275 to 325 psi. Elevated, frame mounted pump and motor assembly keeps clear of debris accumulation in pit.

STANDARD OPERATIONAL FEATURES: The VH Series Leveler is controlled remotely from wall mounted control panel. An array of optional control panel features are available. Service range is from 12" above to 12" below dock level. Lip keepers welded to frame members provide nighttime security and cross-traffic support. Full operating range toe guards are provided as standard. Maintenance prop with 'Lock-out Tag-out' capability is provided as standard. Factory finish includes rust inhibitive prime coat industrial grade finish. Special coating and colors are optional. Each VH Series Leveler is shipped with two (2) (B410-14) 4 1/2" thick x 10" h x 14" w laminated bumpers as standard. 6" thick bumpers are provided as standard on 60,000 lb CIR.

ELECTRICAL: Hydraulic pump motor either 1 1/2 HP TENV at 120v or 208v, single phase or at 208v, 230v, 460v, or 575v three phase. Electrical control panel is Nema 12 enclosure. All electrical components, connections and wiring are UL listed or recognized. **Please Note: Unless specifically noted on quotation, all electrical requirements are the responsibility of others.**

WARRANTY: All POWERAMP VH Series models feature a full one (1) year base warranty on all structural, hydraulic and electrical parts, including freight and labor charges in accordance with Systems, Inc's Standard Warranty Policy. Structural and hydraulic components carry an additional full four (4) year extended warranty with parts and labor. Systems, Inc. warrants all components to be free of defects in materials and workmanship, under normal use, during the warranty period. This base warranty period begins upon the completion of installation or the sixtieth (60th) day after shipment, whichever is earlier. Additional warranty extensions may be available upon approved submittal of application information.

Dimensions and Capacities Select a Model and a Capacity	
MODEL - NOMINAL SIZE	DYNAMIC CAPACITY / COMPARATIVE INDUSTRY RATING
<input type="checkbox"/> VH-66 6' x 6'	<input type="checkbox"/> 12,500/25,000
<input type="checkbox"/> VH-68 6' x 8'	<input type="checkbox"/> 15,000/30,000
<input type="checkbox"/> VH-610 6' x 10'	<input type="checkbox"/> 17,500/35,000
<input type="checkbox"/> VH-612 6' x 12'	<input type="checkbox"/> 20,000/40,000
<input type="checkbox"/> VH-656 6'6" x 6'	<input type="checkbox"/> 22,500/45,000
<input type="checkbox"/> VH-658 6'6" x 8'	<input type="checkbox"/> 25,000/50,000
<input type="checkbox"/> VH-6510 6'6" x 10'	<input type="checkbox"/> 30,000/60,000
<input type="checkbox"/> VH-6512 6'6" x 12'	
<input type="checkbox"/> VH-76 7' x 6'	
<input type="checkbox"/> VH-78 7' x 8'	
<input type="checkbox"/> VH-710 7' x 10'	
<input type="checkbox"/> VH-712 7' x 12'	

Optional Equipment for VH Series Hydraulic Dock Levelers (Check options desired)	
<input type="checkbox"/> PowerHook Restraint	<input type="checkbox"/> Pit Steel (6 piece curb angle set)
<input type="checkbox"/> PowerHold Restraint	<input type="checkbox"/> Pit Steel (4/angle 2/bumper)
<input type="checkbox"/> PowerStop Restraint	<input type="checkbox"/> Pit Kit (3 sided)
<input type="checkbox"/> Grease Fittings	<input type="checkbox"/> Pan Unit (4 sided)
<input type="checkbox"/> Barrier Lip B1 (beveled style)	<input type="checkbox"/> Foam Insulation
<input type="checkbox"/> Barrier Lip B2 (smooth style)	<input type="checkbox"/> Special Color _____
<input type="checkbox"/> Lip Extend Only Button	<input type="checkbox"/> Clean Sweep Frame
<input type="checkbox"/> Mushroom Style E-Stop	<input type="checkbox"/> Clean Pit (Frame Removed)
<input type="checkbox"/> Combo Lip Ext/Leveler Stop Btn	<input type="checkbox"/> Brush Weatherseal
<input type="checkbox"/> Auto Return to Dock (all positions)	<input type="checkbox"/> Rubber Weatherseal
<input type="checkbox"/> 18" Lip	<input type="checkbox"/> CentraPower
<input type="checkbox"/> 20" Lip	<input type="checkbox"/> Vertical Bumpers (laminated)
<input type="checkbox"/> DockAlert Communication System	<input type="checkbox"/> VB420-11 <input type="checkbox"/> VB424-11
<input type="checkbox"/> Other _____	<input type="checkbox"/> 6" Thick Dock Bumpers
<input type="checkbox"/> Other _____	<input type="checkbox"/> Wheel Chocks Model# _____
<input type="checkbox"/> Other _____	<input type="checkbox"/> Dock Light (no bulb) Model# _____

Customer: _____	Certified For Construction:
Job: _____	By: _____
Location: _____	Date: _____
Number of Units: _____	Company: _____
Model: _____	City & State: _____
Size: _____	Voltage/Phase: _____
Represented By: _____	Drawing #: _____
SalesRep: _____	

A continuing product improvement process is in effect at Systems, Inc. We reserve the right to make product changes without prior notice.